

APPLICATION

The paddle type SPDT HFS series are designed to provide excellent performance where accuracy, reliability, and rugged construction are required used in liquid flow lines carrying water or any fluid neither harmful to brass and phosphor bronze nor classified as a hazardous fluids.

They can be wired to close one circuit and open a second circuit when liquid flow either exceeds or drops below the adjusted flow rate.

The HFS series are recommended for liquid pressure and temperature as mentioned below and must not be used on lines carrying liquids below 0 degree C.

These series may be used on liquids with high salt or chlorine content but is not for use in hazardous atmospheres.

They may be also used outdoors but must be protected from weather or splashing water.

All HFS-flow switch Series are designed for use only as operating controls.

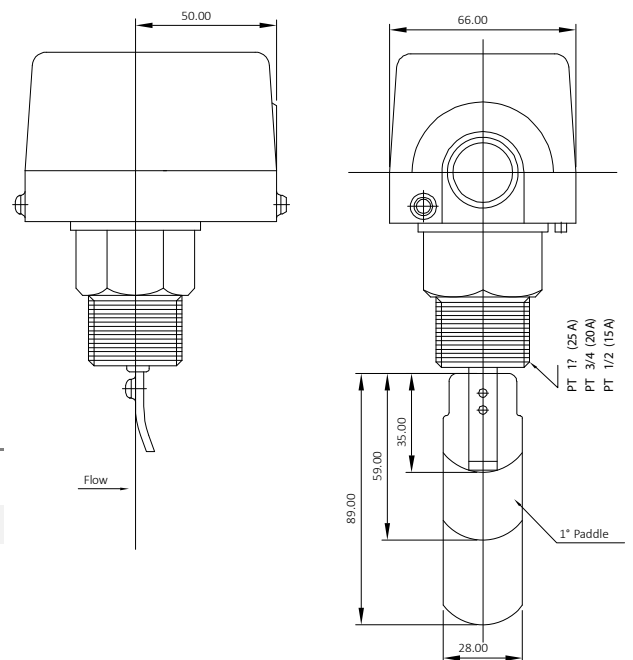
Where an operating control failure would result in personal injury and/or loss of property, it is the responsibility of user to add safety devices that protect against, or supervisory systems that warn of control



SPECIFICATION

Operating Pressure	20kgf/cm² (2MPa)
Withstand Pressure	32Kgf/cm² (3.2MPa)
Insulation Resistance	Over 100Ω, DC500VM
Withstand Voltage	AC1500V/1min.
Contact Point Life	1,000K Cycle
Bellows Life	500K Cycle
Temperature of Fluid	Max 100°C (212°F)
Body Size	1"(HFS-25SS), 3/4"(HFS-20SS), 1/2"(HFS-15SS)
Body Material	Brass
Cover	Stainless
IP Grade	IP43
Unit Weight	0.57KG
Unit/Box Dimension	7 X 9.5 X 16 (CM)
Certification	CE, ROHS (CA18RoHS043)

DIMENSION



ELECTRICAL RATINGS

Type	Voltage	Resistance	Lamp Load	Motor Load
AC	AC 125 V	7.5A	44A	5A
	AC 250 V	15.0A	22A	2.5A
DC	DC 115 V	0.3A		
	DC 230V	0.15A		


PADDLE DIMENSION (mm)

Model	Paddle-1	Paddle-2	Paddle-3	Wide
HFS-25 (1")	35	59	80	26
HFS-20 (3/4")	30	35	40	22
HFS-15 (1/2")	38	40	43	16






This product meets the requirements of **CE**

FLOW RATES IN LITERS PER MINUTE (LPM)

1	PIPE SIZE	2"	4"	6"	8"	10"	12"	14"	16"	18"	20"
2	FLOW QUANTITY	34.5	74.90	149.90	1013.47	1791.0	2776.00	3729.00	4869.00	5360.00	6687.00
3	PADDLE	1	2	3	5	5	5	5	5	5	5

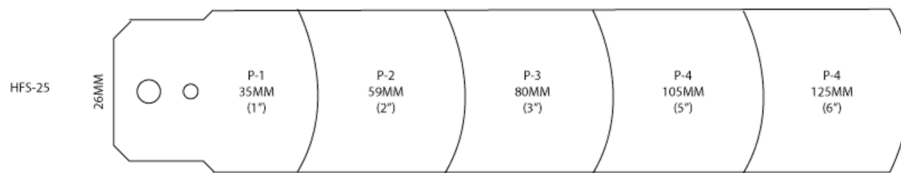

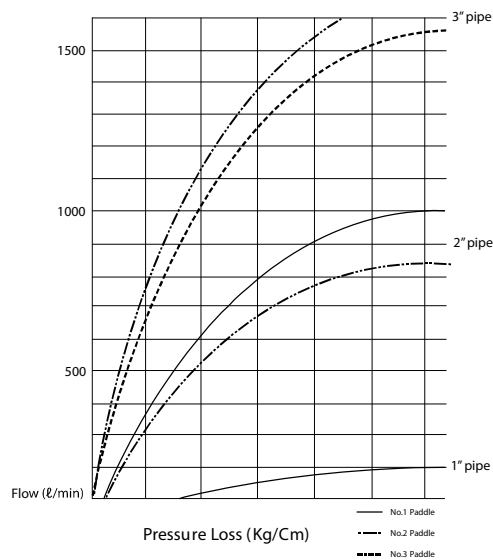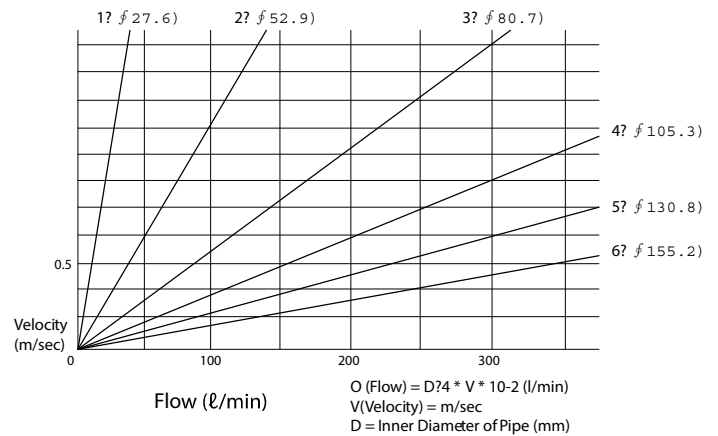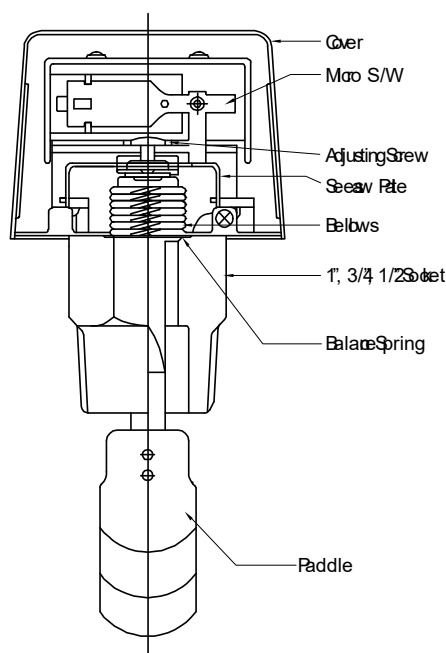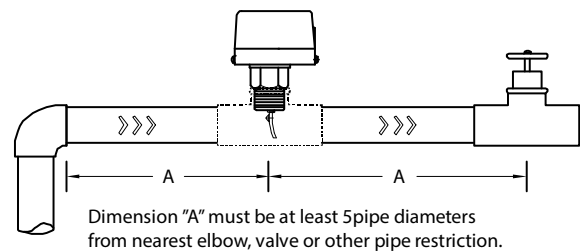*This table illustrates the flow control range obtained from experimental data. A variation of up to 10% can be expected, it is depending on operating conditions. Final adjustments should be made on site using a flow meter.

PRESSURE LOSS RATE**FLOW-VELOCITY****PART OF NAME****TYPICAL INSTALLATION****NO-FLOW****FLOW**